
9A MECHANICAL TERMINATION WITH COUNTER FLASHING



CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)


METAL COUNTER-FLASHING WITH LEAD WEDGES, AS REQUIRED (BY OTHERS).

THREADED FASTENERS OR CARLISLE HP TERM BAR NAIL-IN

CARLISLE TERMINATION BAR

WARRANTY UP TO 30 YEARS **SEE INSET A**

9B MECHANICAL TERMINATION




CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)

CARLISLE HP TERM BAR NAIL-IN

CARLISLE TERMINATION BAR

WARRANTY UP TO 20 YEARS **SEE INSET A**

9C COUNTER FLASHING TERMINATION



CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)

METAL COUNTER-FLASHING WITH LEAD WEDGES, AS REQUIRED (BY OTHERS).


FASTEN MEMBRANE @ 12" (30cm) O.C. MAX. USE GALVANIZED WASHERS, MIN. 1", (2.54cm) DIAMETER

NOTE:

1. WHEN MECHANICAL FASTENERS ARE USED TO PENETRATE THE METAL COUNTER-FLASHING, USE EPDM WASHERS, APPLY WATER CUT-OFF MASTIC UNDER THE COUNTER-FLASHING OR CAULK THE FASTENER HEADS.

WARRANTY UP TO 10 YEARS

INSET A

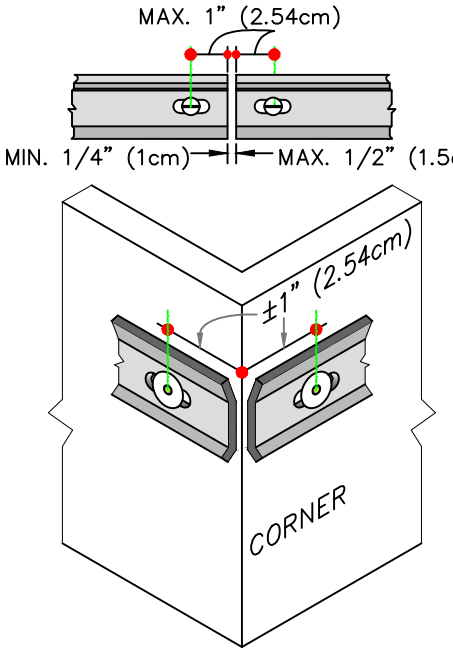

NOTES:

1. APPLY ON HARD SMOOTH SURFACE ONLY; NOT FOR USE ON EXPOSED WOOD.
2. DO NOT WRAP TERMINATION BAR AROUND CORNERS.
3. DETAIL 9D ON PAGE 2 OF 3 MUST BE USED AT VERTICAL JOINTS IN PANEL WALLS.

xxx WATER CUT-OFF MASTIC- MUST BE HELD UNDER CONSTANT COMPRESSION.

FleeceBACK MEMBRANE
APPROVED ADHESIVE
APPROVED SUBSTRATE
0 SEE NOTE(S)

MEMBRANE TERMINATIONS (PAGE 1 OF 3)


WARRANTY AS NOTES FOR EACH DETAIL

DETAIL NO. FB-9

FLEECEBACK ADHERED

©2024 Carlisle SynTec a division of Carlisle Construction Materials Incorporated

9D MECHANICAL TERMINATION AT VERTICAL JOINTS

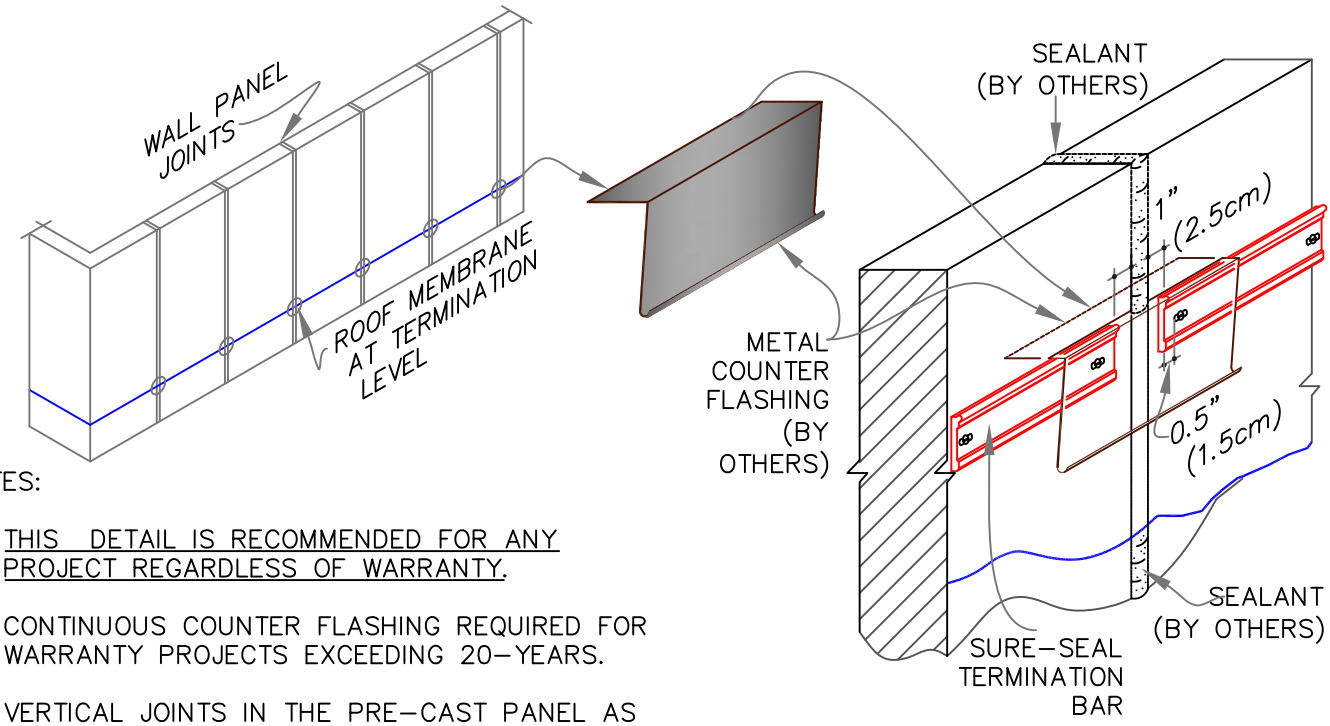


NOTES:

1. THIS DETAIL IS RECOMMENDED FOR ANY PROJECT REGARDLESS OF WARRANTY.
2. CONTINUOUS COUNTER FLASHING REQUIRED FOR WARRANTY PROJECTS EXCEEDING 20-YEARS.
3. VERTICAL JOINTS IN THE PRE-CAST PANEL AS WELL AS ALL GAPS AT THE JUNCTION OF THE TILT-UP PANEL AND ROOF DECK MUST BE FULLY SEALED TO PREVENT AIR INFILTRATION.
4. APPLY ON HARD SMOOTH SURFACE ONLY.

9E SecurEdge 200 & 300 COPINGS

NOTES:

1. MEMBRANE MUST BE EXTENDED AT CORNERS TO PROVIDE COMPLETE COVERAGE OF THE TOP WALL SURFACE. SEE 3D DETAIL 9F ON PAGE 3 OF 3.
2. REFER TO SecurEdge COPING INSTALLATION INSTRUCTION MANUAL FOR STEP-BY-STEP INSTRUCTION PROCEDURES.
3. STOP ADHESIVE AT APPROPRIATE DISTANCE TO AVOID STAINING ON EXTERIOR FACE OF WALL. EXTEND THE MEMBRANE DOWN & TEMPORARILY SECURE WITH CAPPED NAILS AT 12" (30.5cm) O.C. ENSURE SEAMS ARE SEALED.

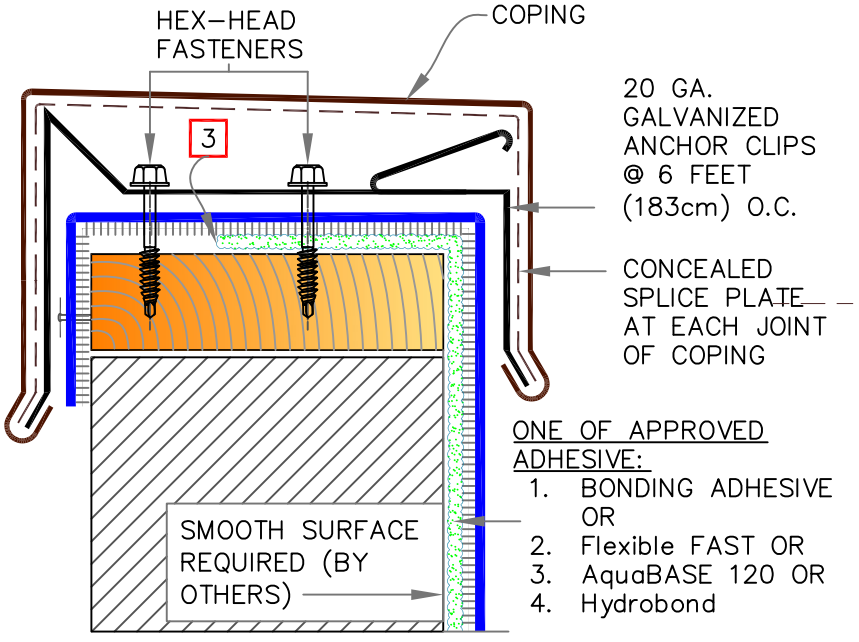

FleeceBACK MEMBRANE
APPROVED ADHESIVE
APPROVED SUBSTRATE
0 SEE NOTE(S)

MEMBRANE TERMINATIONS (PAGE 2 OF 3)


WARRANTY AS NOTES FOR EACH DETAIL


DETAIL NO. FB-9

FLEECEBACK ADHERED

©2024 Carlisle SynTec a division of Carlisle Construction Materials Incorporated

9F | SHEET METAL COPING (BY OTHERS)

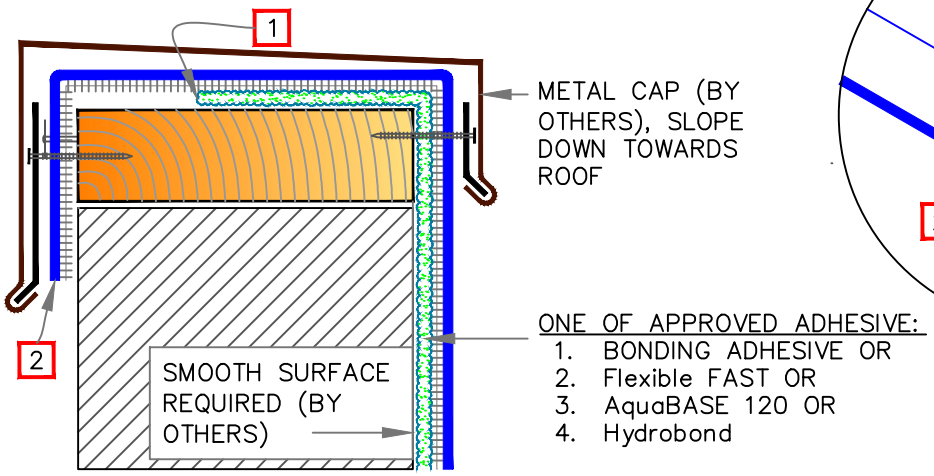

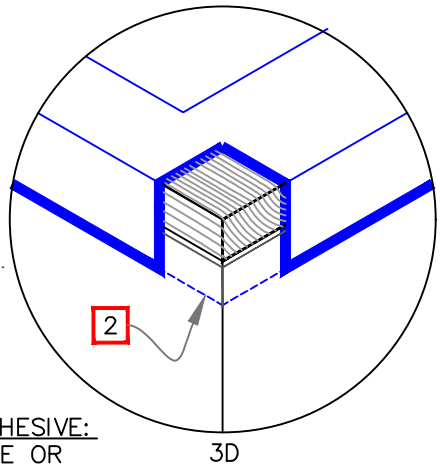


NOTES:

1. STOP ADHESIVE AT APPROPRIATE DISTANCE TO AVOID STAINING ON EXTERIOR FACE OF WALL. EXTEND THE MEMBRANE DOWN & SECURE WITH CAPPED NAILS AT 12" (30.5cm) O.C. ENSURE SEAMS ARE SEALED.

2. EXTEND THE MEMBRANE BELOW THE JOINT. AT CORNERS, MEMBRANE MUST BE EXTENDED TO PROVIDE COMPLETE COVERAGE OF WALL SURFACE.

9G | MASONRY COPINGS (BY OTHERS)

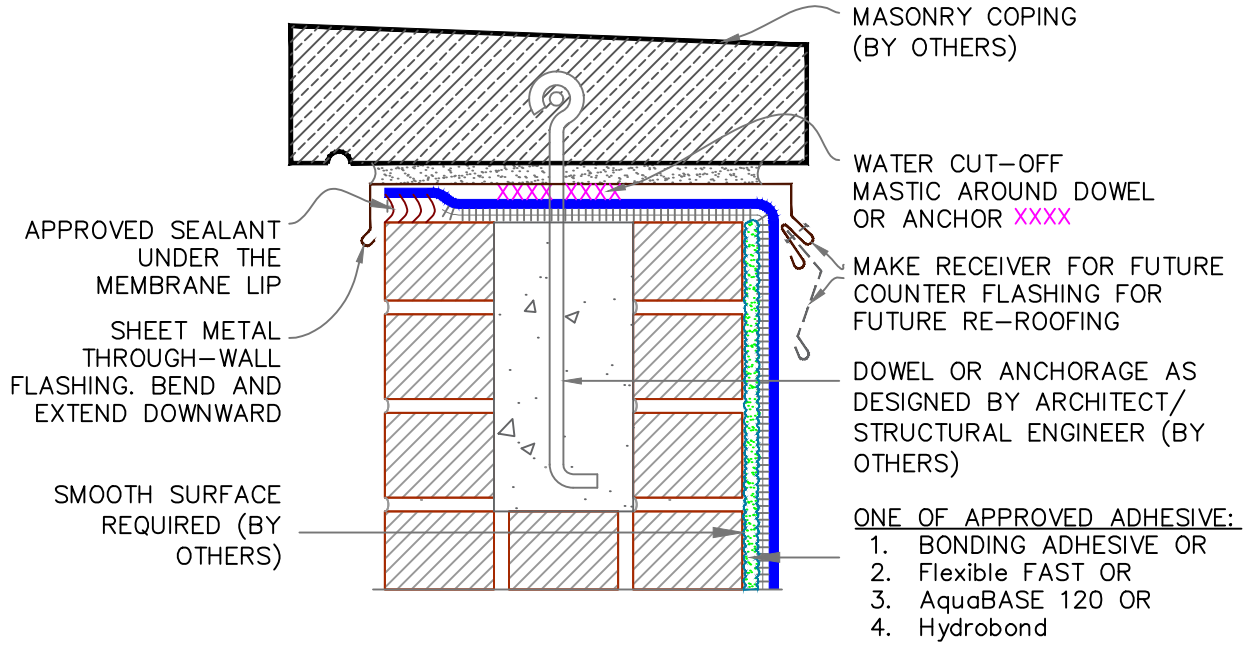

XXX WATER CUT-OFF MASTIC- MUST BE HELD UNDER CONSTANT COMPRESSION.

FleeceBACK MEMBRANE APPROVED ADHESIVE APPROVED SUBSTRATE 0 SEE NOTE(S)	MEMBRANE TERMINATIONS (PAGE 3 OF 3) MAXIMUM WARRANTY: 30 YEARS	DETAIL NO. FB-9 FLEECEBACK ADHERED

©2024 Carlisle SynTec a division of Carlisle Construction Materials Incorporated