
CAUTION

DETAIL NOT FOR USE ON 25 OR 30 - YEAR WARRANTY PROJECTS, PRE - FABRICATED / PRE - MOLDED ACCESSORIES MUST BE UTILIZED. ACCEPTABLE PIPE FLASHINGS SHALL CONFORM WITH PVC UNIVERSAL DETAILS U - 8A, U - 8E

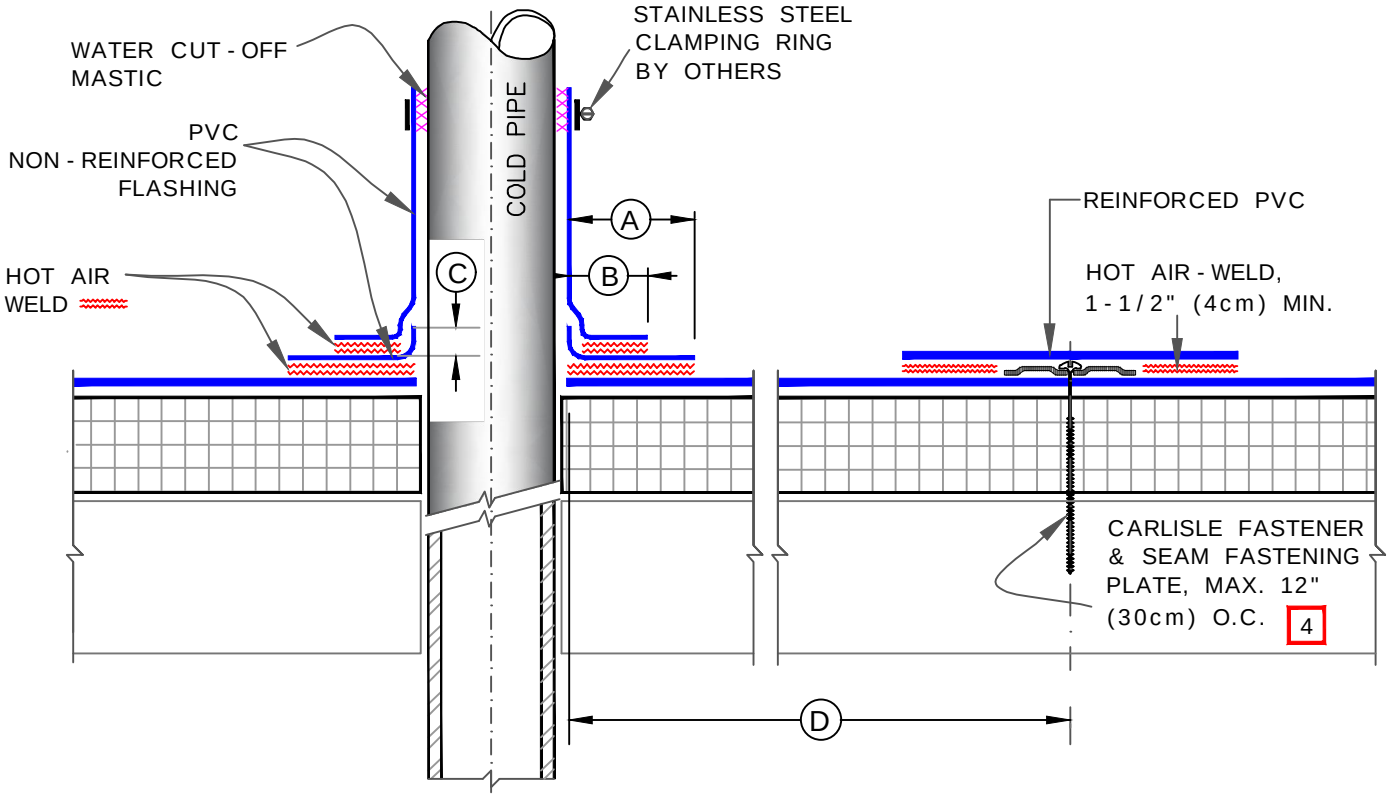

DIMENSIONS		cm	
A	1 - 1 / 2"	4	TO
	2"	5	
B	1"	2.5	MIN.
C	1 / 2"	1.5	MIN.
D	12"	30	APPROX.

NOTES:

1. REMOVE ALL EXISTING LEAD AND FLASHING MATERIAL BEFORE INSTALLING FIELD FABRICATED PIPE FLASHING.
2. TEMPERATURE OF THE PIPE PENETRATION MUST NOT EXCEED 140 F (60 C).
3. PVC NON - REINFORCED FLASHING WRAPPED AROUND PIPE SHALL HAVE MINIMUM 1 - 1 / 2" (4cm) VERTICAL HOT AIR WELD. INSTALL A MINIMUM OF 4 SEAM FASTENING PLATES FOR PIPES WITH A DIAMETER UP TO 6" (15cm). ADDITIONAL SEAM FASTENING PLATES WILL BE REQUIRED FOR PIPES GREATER THAN 6" (15cm) IN DIAMETER AND SHALL BE SPACED 12" (30cm) ON CENTER MAXIMUM.
4. FASTENERS / PLATES ARE NOT REQUIRED ON ADHERED SYSTEMS UNLESS PIPE DIAMETER EXCEEDS 18" (50cm).

FASTENER TYPES ON MECHANICALLY FASTENED ROOF ASSEMBLY

DECK TYPE	OPTION	FASTENER	PLATE
STEEL OR WOOD	A	HP - X	PIRANHA
	B	HP - XTRA	PIRANHA XTRA
STRUCTURAL CONCRETE	A	CD - 10	PIRANHA
	B	HD 14 - 10	PIRANHA

CARLISLE SYNTEC SYSTEMS

FIELD–FABRICATED PIPE FLASHING

WARRANTY: SEE WARRANTY NOTE

PVC

DETAIL NO. U - 8B

U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated