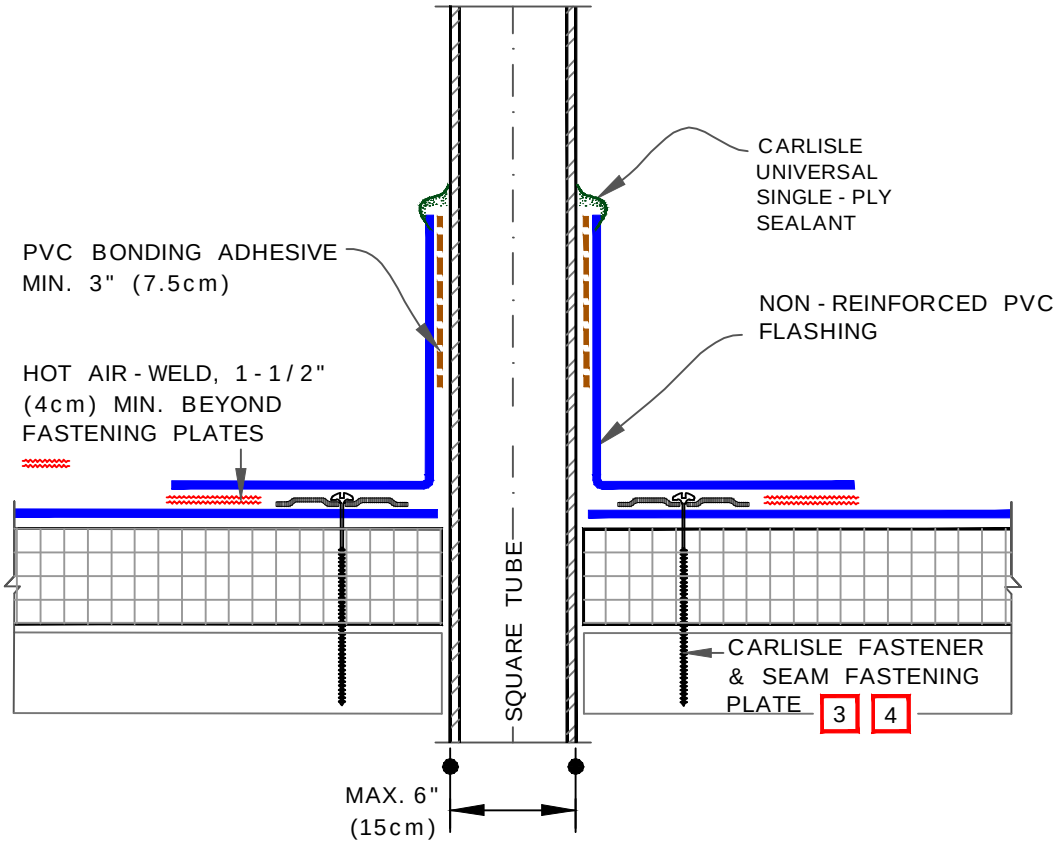

FASTENER TYPES ON MECHANICALLY FASTENED ROOF ASSEMBLY

DECK TYPE	OPTION	FASTENER	PLATE
STEEL OR WOOD	A	HP - X	PIRANHA
	B	HP - XTRA	PIRANHA XTRA
STRUCTURAL CONCRETE	A	CD - 10	PIRANHA
	B	HD 14 - 10	PIRANHA

NOTES:

1. REMOVE ALL EXISTING LEAD AND FLASHING MATERIAL BEFORE INSTALLING PRE - FABRICATED SQUARE TUBE WRAP.
2. TEMPERATURE OF THE PIPE PENETRATION MUST NOT EXCEED 140 F (60 C).
3. INSTALL A MINIMUM OF 4 SEAM FASTENING PLATES FOR TUBE SIDE DIMENSIONS UP TO 6" (15cm).
4. FASTENERS AND PLATES ARE NOT REQUIRED ON ADHERED SYSTEM. SEE TABLE FOR MECHANICALLY FASTENED ROOF ASSEMBLY.

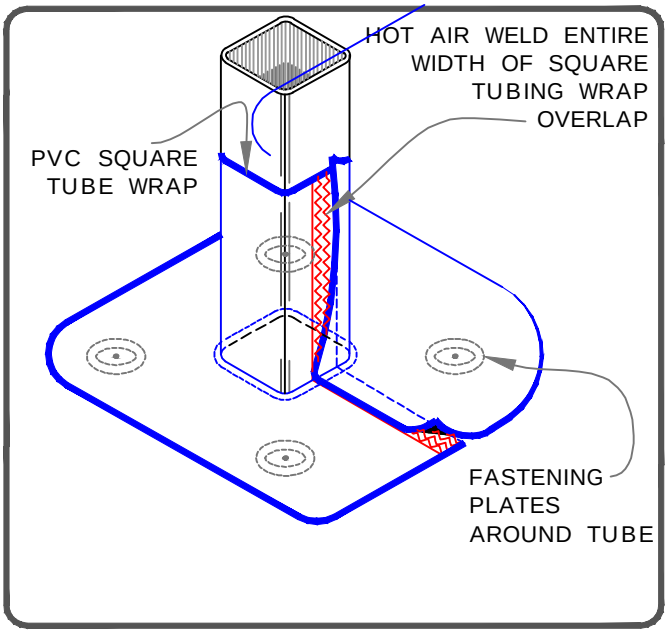

CARLISLE SYNTEC SYSTEMS

CFA CERTIFIED PRE-FABRICATED SQUARE TUBE WRAP

MAXIMUM WARRANTY: 30 YEARS

PVC

DETAIL NO.

U - 8C

U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated